


STANDARD DEPARTURE CHART -
INSTRUMENT (SID) - ICAO

AERODROME ELEV - 1493
HEIGHTS RELATED TO
THR RWY 16 - ELEV 1447 M
THR RWY 34 - ELEV 1493 M

APP 130

KHOVD/KHOVD (ZMKD)
RWY 16/34
HARUS 1A/1B
ACFT CAT A/B/C

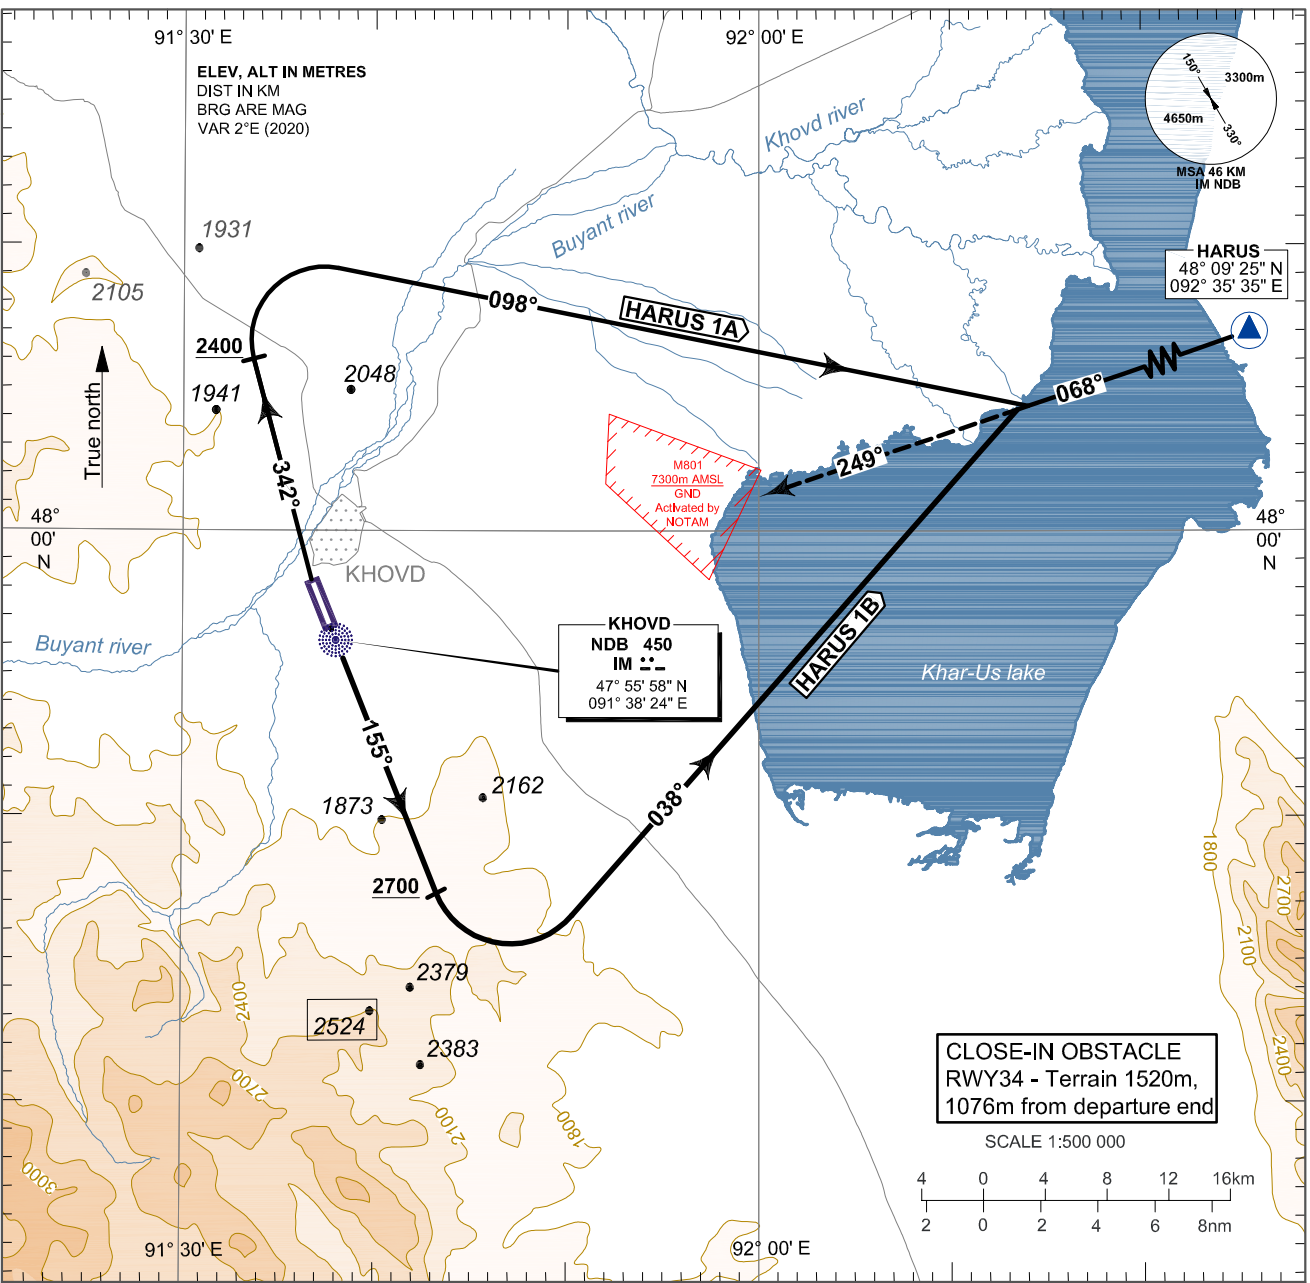

For HARUS 1A:

Climb HDG 342° to ALT 2400, climbing right turn to HDG 098°, then intercept flight planned route to HARUS.

PDG: 5.3% is required until ALT 2400

For HARUS 1B:

Climb HDG 155° to ALT 2700, climbing left turn to HDG 038° then intercept flight planned route to HARUS.

PDG: 5.3% is required until ALT 2700

VIS	550m								
	km/h	200	250	300	350	400	450	500	550
Ground Speed	kt	110	135	160	185	210	235	260	285
	m/s	2.94	3.68	4.42	5.15	5.89	6.63	7.36	8.10
Rate of Climb at 5.3%	ft/min	590	725	859	993	1127	1261	1395	1530
	m/s	1.83	2.29	2.75	3.21	3.67	4.13	4.58	5.04
Rate of Climb at 3.3%	ft/min	368	451	535	618	702	785	869	952
	m/s	1.15	1.41	1.68	1.95	2.22	2.49	2.76	3.03

CHANGE: VAR updated; Military area and contour line ELEV added in the conversion table; Editorial.